

PROLIFT WINCH

240 VOLT HOISTING WINCH – “LIFTING RATED”

All winches include 2.7m pendant control lead, overload circuit breaker and electromagnetic brake
 * All winch models must be protected from exposure to water / moisture / weather



MODEL F05-20
Lifting Capacity 200 kg
 Wire rope 6.0mm x 30 lm
 Line speed 13 m/min
 Motor .55 kw
 Net weight 29.2 kg

MODEL F05-25
Lifting Capacity 250 kg
 Wire rope 6.0mm x 30 lm
 Line speed 13 m/min
 Motor .75 kw
 Net weight 32.2 kg

MODEL F05-30
Lifting Capacity 300 kg
 Wire rope 8.0mm x 30 lm
 Line speed 13 m/min
 Motor 1.1 kw
 Net weight 40.2 kg


MODEL F05-50
Lifting Capacity 500 kg
 Wire rope 8.0mm x 30 lm
 Line speed 13 m/min
 Motor 1.6 kw
 Net weight 48.2 kg

MODEL F07-50
Lifting Capacity 500 kg
 Wire rope 8.0mm x 50 lm
 Line speed 18 m/min
 Motor 1.8 kw
 Net weight 65.2 kg

* Circuit overload not available on F07-50
 * 100 meter wire rope model available POA

WINCH DIMENSIONS

MODEL	A	B	C	D	E
F05-20	142 mm	210 mm	474 mm	142 mm	265 mm
F05-25	144 mm	210 mm	527mm	142 mm	265 mm
F05-30	161mm	220 mm	556 mm	186 mm	280 mm
F05-50	161mm	220 mm	625 mm	186 mm	288 mm
F07-50	160 mm	250 mm	661 mm	206 mm	295 mm

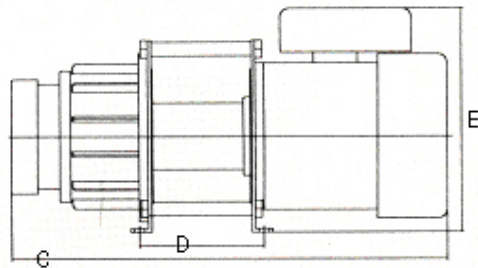

PROLIFT MINI HOIST

MODEL MW-170
Lifting Capacity 170 kg
 Wire rope 4.0mm x 30 lm
 Line speed 21 m/min
 Motor 1.2 kw
 Net weight 15.0 kg

MODEL MW-260
Lifting Capacity 260 kg
 Wire rope 5.0mm x 25 lm
 Line speed 15 m/min
 Motor 1.2 kw
 Net weight 20.0 kg

All Mini hoists include power supply / pendant control leads (7.4 m) , upper limit switch and electromagnetic brake



Distributed by :



Phone : (09) 414 1137
 Website ; www.traxion.co.nz
 Fax : (09) 414 1138 Email : sales@traxion.co.nz